

Features


- Low on-resistance
- High-speed switching
- Drive circuits can be simple
- Parallel use is easy

Application



- Small Servo Motor Controls
- Power MOSFET Gate Drivers
- Switching Application

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
100V	3.5Ω@10V	0.15A
	4.0Ω@4.5V	

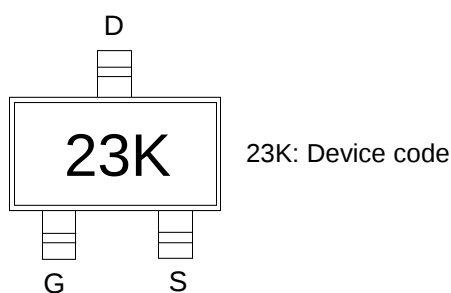

Marking and pin assignment



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V _{DS}	Drain-Source Breakdown Voltage		100	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-50 to 155	°C
I _S	Diode Continuous Forward Current	Tc=25°C	0.15	A

Mounted on Large Heat Sink







I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}C$	0.76	A
I_D	Continuous Drain Current	$T_C=25^{\circ}C$	0.15	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}C$	0.3	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient		400	°C/W

Ordering Information (Example)


Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
BSS123KT	SOT-523	23K	3,000	45,000	180,000	7"reel

Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V	--	--	1.0	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±10	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	--	3.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =0.1A	--	3.5	5.0	Ω
		V _{GS} =4.5V, I _D =0.1A	--	4.0	6.0	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =50V, V _{GS} =0V, f=1MHz	--	31.6	--	pF
C _{OSS}	Output Capacitance		--	2.8	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	2	--	pF
Q _g	Total Gate Charge	V _{DS} =50V, I _D =0.2A, V _{GS} =10V	--	0.74	--	nC
Q _{gs}	Gate Source Charge		--	0.08	--	nC
Q _{gd}	Gate Drain Charge		--	0.26	--	nC
Switching Characteristics@ TJ = 25°C (unless otherwise stated)						
t _{d(on)}	Turn-on Delay Time	V _{DD} =50V, I _D =0.2A, R _G =3.3Ω, V _{GS} =10V	--	2	--	nS
t _r	Turn on Rise Time		--	3.1	--	nS
t _{d(off)}	Turn-Off Delay Time		--	6.5	--	nS
t _f	Turn Off Fall Time		--	15	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=0.15A	--	--	1.2	V

Typical Operating Characteristics

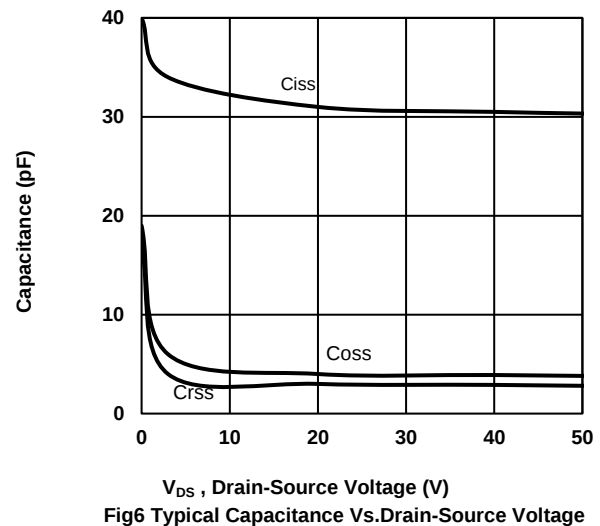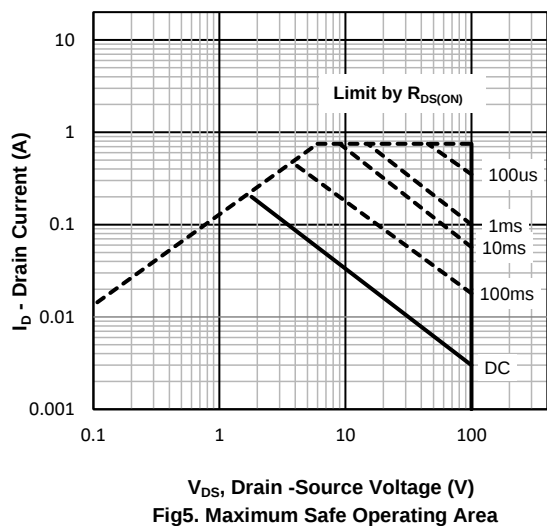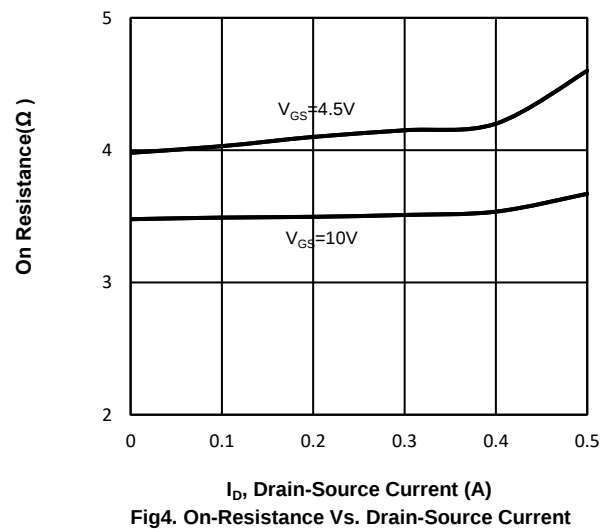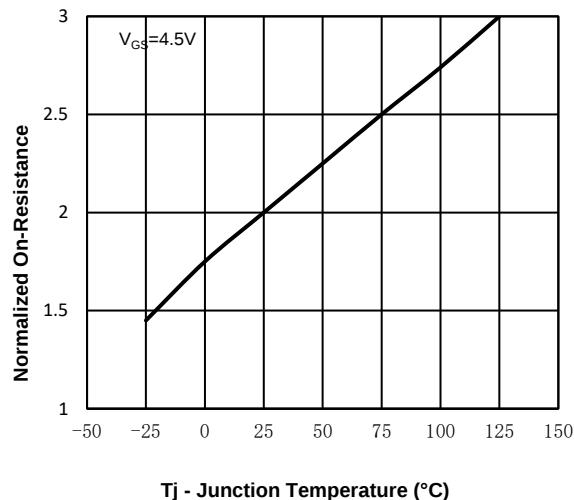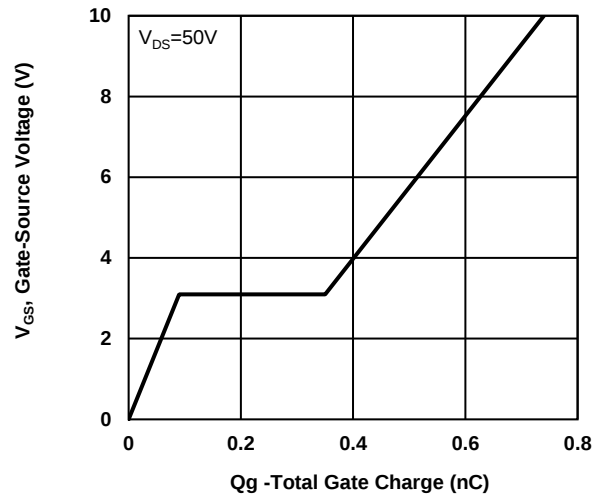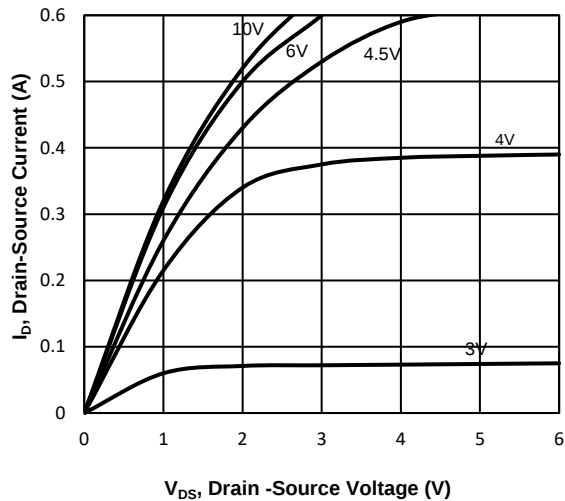

SOT-523 Package information

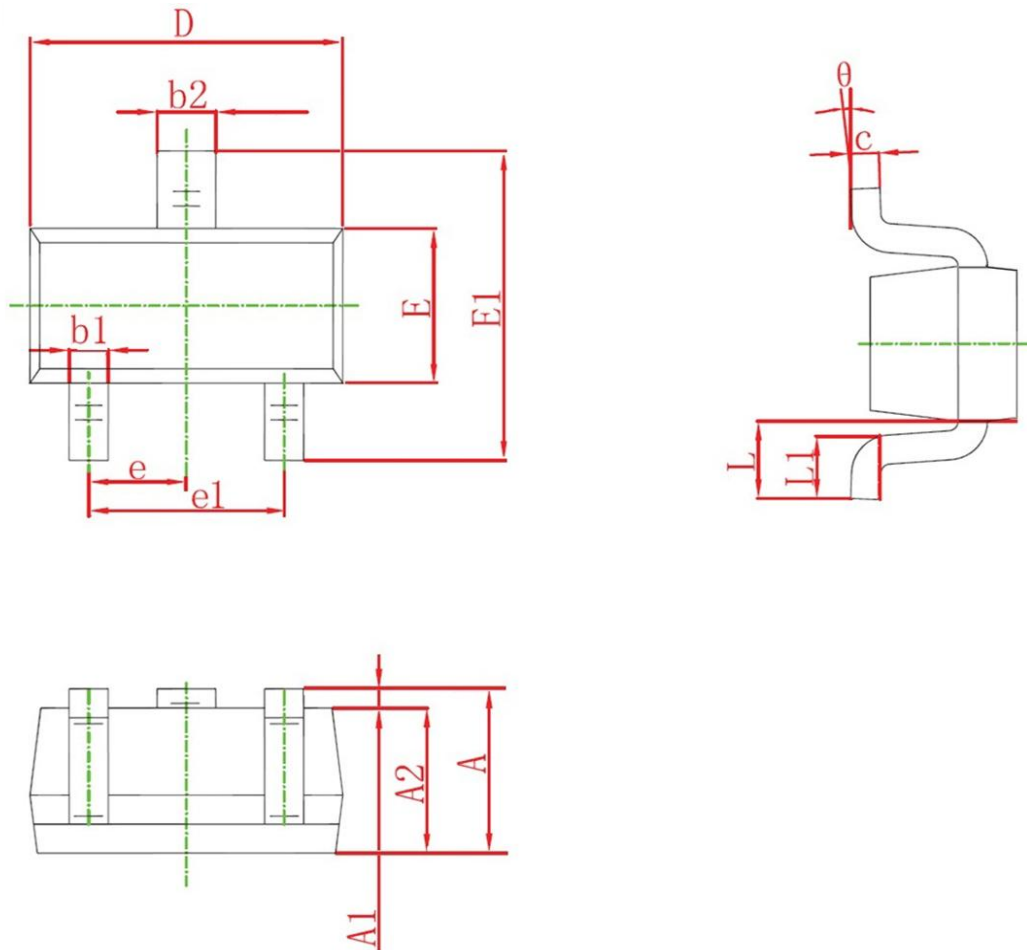

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b1	0.150	0.250	0.006	0.010
b2	0.250	0.350	0.010	0.014
c	0.100	0.200	0.004	0.008
D	1.500	1.700	0.059	0.067
E	0.700	0.900	0.028	0.035
E1	1.450	1.750	0.057	0.069
e	0.500TYP		0.020TYP	
e1	0.900	1.100	0.035	0.043
L	0.400REF		0.016REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°